

Enriched Renewable Methane from the Anaerobic Digestion of Petrochemical Wastewater: A Bio-Remediation Study

¹M.N.I.Siddique, ²M.F.Ishak and ³A.W.Zularisam

^{1,2,3}Faculty of Engineering Technology, University Malaysia Pahang, 26300 Kuantan, Pahang,
Malaysia

¹mdnurul@ump.edu.my

Abstract- Scarcity of nitrogenous resource and buffering capability were recognized as reverting failure in earlier research treating petrochemical wastewater in anaerobic continuous stirred tank reactors. The purpose of this work is to explore the use of ammonium bicarbonate (NH_4HCO_3) as supplementation ensuring nitrogenous supply and buffering requirement. With a view to measure the effect of NH_4HCO_3 on the anaerobic process, a set of dosing up to 40 mg L^{-1} was examined. The result was evaluated in terms of biogas yield. It was found that 10 mg L^{-1} dosing was the optimal dosing without affecting methanogenesis. Moreover, mathematical calculation explained that this optimum dosing can enhance biogas yield up to 27.77% compared to control PWW digestion. Results showed an obvious financial advantage to make the industrial application feasible.

Index Terms- Anaerobic digestion, ammonium bicarbonate, biogas yield, petrochemical waste water.

I. INTRODUCTION

The anaerobic digestion process among other treatment methods has been recognized as the core method of an advanced technology for environmental protection [1]. Earlier studies suggested that PWW craves supplementary substrates to sustain its critical operational parameters such as alkalinity, pH and biomass [2-3]. Investigation during the operation flashed that those parameters had gone below recommended levels [4-5]. Consequently, after increasing the organic loading rate (OLR) to the level of $6 \text{ kg COD m}^{-3}\text{day}^{-1}$, the whole experimental operation had failed [6-7]. The failure was countervailed by a sudden drop of pH and increasing concentration of volatile fatty acid (VFA)[8-9]. It is well known that these two factors are limiting to the anaerobic digestion process, especially to the sensitive methanogen group of bacteria [10]. However, the amount of organic loading at $6 \text{ kg COD m}^{-3}\text{day}^{-1}$ was found to be too low to cause failure in anaerobic upflow fixed film reactor (UFR) [11-12]. Thus, insufficient buffering control and disruption of microbial population balance between non-methanogen and methanogen to convert carbonaceous organic to CH_4 , were identified to be the main reason of operational failure [13-14]. To control the level of volatile fatty acid in the system, alkalinity has to be maintained by recirculation of treated effluent

[15-16] to the digester or addition of lime and bicarbonate salt [17-18]. As this process has been shown to be a proficient alternative both to pollution control and to produce CH₄ as the bioenergy, hindrances while operation should be mend [19-20].

This study was undertaken to propose the use of ammonium bicarbonate (NH₄HCO₃), due to its buffering requirement against acidity throughout the treatment operation and also to maintain the microbial population balance. So, significant roles will be performed by NH₄⁺ as the recommended bacterial nutrient for nitrogen and buffering capacity in an anaerobic digester [6]. However, excessive NH₄HCO₃ concentrations create free ammonia toxicity especially to the methanogen [7]. Hence, the optimal dosage for NH₄HCO₃ applied as supplement in anaerobic codigestion process should be determined.

II. RESEARCH DESIGN & METHODOLOGY

The petrochemical wastewater is a complex mixture of organic pollutants can be fermented to methane, which has been analyzed to be lacking in alkalinity and nitrogenous resources. Preparation of PWW was accomplished according to a previous study by diluting the stock liquor [21]. Table 1 explains the characterization of PWW. The dilution of concentrated petroleum resulted in a consistent concentration of wastewater up to 3000 mg L⁻¹ of COD, which is in the range of medium strength wastewater [22]. With a view to remove the debris the prepared sludge was initially passed through a screen.

Table 1 Composition and Characteristics of PWW

Parameters	PWW
pH	6.2±0.2
BOD	7850±10
COD	15200±15
TOC	4980±10
Total solids	320±2
Acetic acid	1500±5
Phenol	360±2
Total Nitrogen	48±0.5
Total Phosphate	106±1

*Except pH and Acetic acid, all parameters in mgL⁻¹

*Values are the mean + S.D. of the 3 determinations

Immersing a set of air sealed digesters (1L) in a water bath; the effect of NH₄HCO₃ on the anaerobic digestion of PWW was investigated. The operating temperature was maintained at 37° C. In order to monitor biogas generation, the digesters were linked to biogas measuring device. All digesters were seeded with 300 mL of stabilized sludge and 150 mL of PWW with COD of 3000 mg L⁻¹, before testing by batch operation. The reason behind it was to pretend non-critical COD loading at 0.5 kg m⁻³ so that the shock loading to seed substrate could be avoided. An incremental set of concentrations up to 40 mg L⁻¹ were prepared in duplicates of five containers via dosing of NH₄HCO₃. The supplementation dosing up to 40 mg L⁻¹ was preferred to find optimal one. To ensure sufficient mixing and to assist the yield of biogas, all digesters were mildly stunned per 10 min. The optimum dosing for NH₄HCO₃ was calculated depending on the cumulative biogas yield. An assumption might be made that accelerated biogas yield would generate within 3 h of batch process for similar substrate [23]. Nonetheless, the toxicity of NH₄HCO₃ especially to the methanogen in the system could be

indicated in contrast of the maximum biogas yield [24]. In the previous study Configuration of CH₄:CO₂ was at the ratio of 25:75 [23]. Even so, the biogas generation in this work was assumed to be too little for analysis by gas analyzer. Liquid displacement method was applied to measure gas generation [25].

III. RESULTS AND DISCUSSIONS

Former operational breakdown that was provoked by VFA agglomeration might have happened through supplementary confines like as micronutrients (Fe, Mg, Ni, Cu, Co and P). Nonetheless, theoretically the scarcity of micronutrients might be abolished on the basis of mineral percentage. As seed sludge was collected from partially digested sewage, the content of phosphorus must be sufficient. Consequently, the lack of phosphorus was also not being addressed. For the time being, the existence of ammoniacal nitrogen as the resource macronutrient in a stabilized digested sludge is acknowledged to be at an outstanding concentration after de-nitrification process is accomplished [26]. Sodium nitrate is an alternative supplementation to meet up the want of nitrogenous resource. Still, in case of its application, the discharge of NO₃⁻¹ would enhance the oxidation–reduction potential (ORP) of the reactor. The ORP potential of the reactor supposed to maintain above -300 mV. It was due to the cause that methanogenesis is deteriorated at lesser ORP [27]. In order to adjust the buffering capacity of the substrate solution, chemical selection is a rate limiting factor. Unwanted solids are created due to Precipitation of CaCO₃.

Figure. 1 illustrates the effect of NH₄HCO₃ supplementation to anaerobic co-digestion process. However, the digestion performance has been evaluated in terms of cumulative biogas generation vs. time graph. It slows through termination of raw resources. While NH₄HCO₃ dosing, total cumulative biogas generation was detected to increase. More specifically, at 10 mg L⁻¹ dosing and contact time ranging from 15 to 180 min, cumulative biogas generation was enhanced. Subsequently, the cumulative biogas generation was detected to drop in case of 20, 30, 40 mg L⁻¹ dosing applied to the process. The C:N ratio was maintained fixed at within the range of 25/1 to 30/1. However, the detailed data revealed that the maximum biogas generation took place while 10 mg L⁻¹ of NH₄HCO₃ was applied. It has been reported that the CH₄ yield from the petroleum wastewater ranged between 0.37–0.43 m³ m⁻³ d⁻¹ [28]. During the current work, CH₄ yield was calculated assuming similar substrate digestion. The maximum CH₄ yield from this study could be equal to 60 mL, as listed in Table 2. From Figure. 1 it is obvious that the data collected during digester operation is consistent enough having regression co-efficient value of 0.9925, 0.9868, 0.9825, 0.9872 and 0.9935.

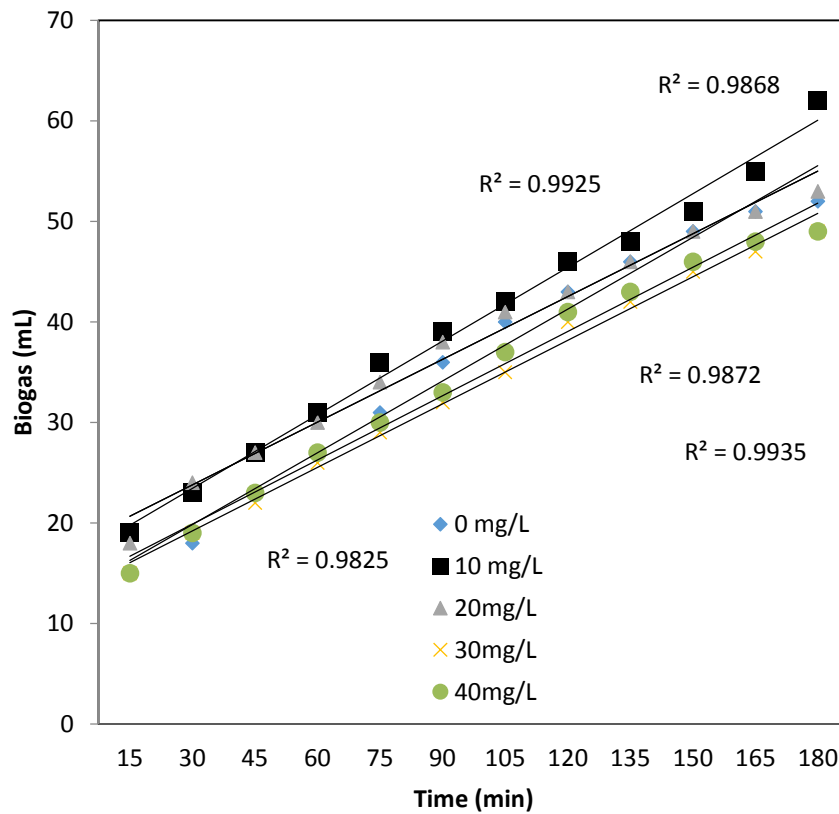


Figure 1 Evaluation of digestion performance in terms of cumulative biogas generation vs. time graph

Table 2 Results of NH_4HCO_3 dosing to anaerobic digestion system in terms of Cumulative biogas generation

Contact time (min)	Mean cumulative biogas generation (mL)				
	NH_4HCO_3 dosing (mg/L)				
	0	10	20	30	40
16	15	19	18	15	15
30	18	23	24	19	19
45	23	27	27	22	23
60	27	31	30	26	27
75	31	36	34	29	30
90	36	39	38	32	33
120	40	42	41	35	37
105	43	46	43	40	41
135	46	48	46	42	43
150	49	51	49	45	46
165	51	55	51	47	48
180	54	62	53	49	49

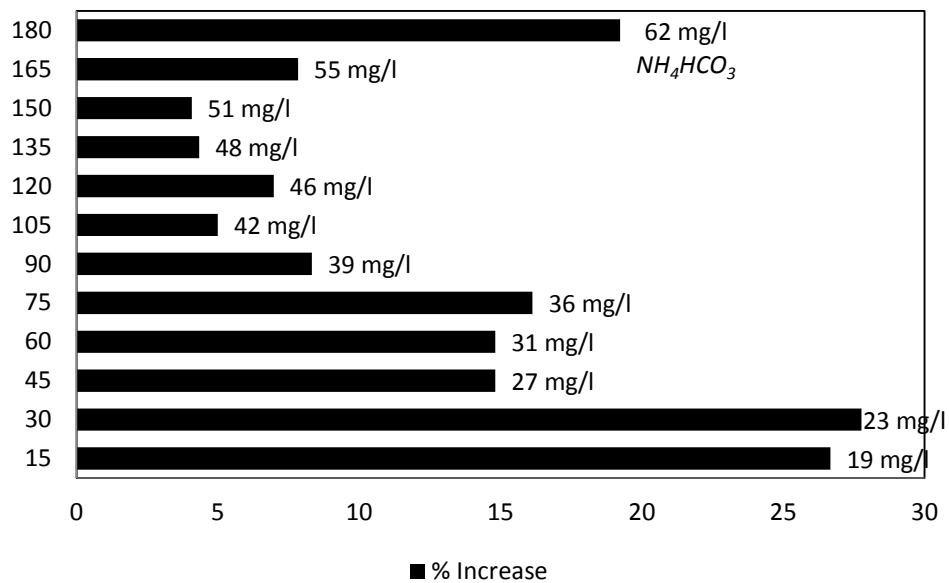


Figure 2 Determinations of % increase in biogas yield from NH_4HCO_3 supplemented co-digestion of PWW compared to control digestion of PWW

For the calculation of % increase in biogas yield the following formula was employed:

$$\% \text{ increase in biogas yield} = (A - B) / B * 100$$

Where, A = Biogas yield at dosing 10 mg/L

B = Biogas yield at dosing 0 mg/L (control)

For example, at contact time of 16 min, % increase in biogas yield = $(19 - 15) / 15 * 100 = 26.67\%$.

Figure. 2 is actually a comparison of effectiveness of NH_4HCO_3 dosing with control PWW digestion. The obvious effect of 10 mg/L NH_4HCO_3 dosing has been demonstrated along with contact time ranging between 15 to 180 min. From contact time vs. % increase in biogas yield curve it can be stated that the maximum enhancement in biogas yield is 27.77% at contact time of 30 min. It might be due to the fast reaction took place at that specific environmental condition. It has been studied, for the transformation of carbonaceous materials into CH_4 during the anaerobic digestion system, sustaining methanogenesis was the key operational process. H_2 and CO_2 will be used by Hydrogenotrophic methanogens while acetic acid and CO_2 will be used by acetoclastic methanogens to give CH_4 as eventual outcome [29]. The volatile fatty acid (VFA) accumulation is suggested to be avoided employing supplementation of strong bases and co-digestion with other wastes. This strategy provides appropriate C/N ratio of 30 and strong buffering capacity to pH change. As a result methanogenesis occurs with great stability leading to enhanced CH_4 generation. It can be concluded from Figure. 2 that $10 \text{ mg L}^{-1} \text{NH}_4\text{HCO}_3$ dosing can provide up to 27.77% enhanced biogas yield compared to control PWW digestion.

IV. CONCLUSIONS

This study reveals that the NH_4HCO_3 may accelerate the anaerobic digestion of PWW. Ultimately, 10 mg L^{-1} of NH_4HCO_3 dosing was found to be the optimal dose for the substrate in comparison to the enhanced doses up to 40 mg L^{-1} . Moreover, the effectiveness of NH_4HCO_3 supplementation was also explained by formula. According to the calculation, 10 mg L^{-1} NH_4HCO_3 dosing can provide up to 27.77% enhanced biogas yield compared to control PWW digestion. This achievement can obviously add some financial advantage to make the treatment policy more feasible for industrial application.

V.ACKNOWLEDGEMENT

The authors would like to thank faculty of civil engineering and earth resources, university Malaysia Pahang, for providing continuous laboratory facility. The present research was made possible availing facility provided by RDU-0903113.

REFERENCES

- [1] Siddique M N I, Munaim M S A M and Zularisam AW, "Mesophilic and thermophilic bio-methane production by co-digesting pretreated petrochemical wastewater with beef and dairy cattle manure", *J. Ind. Eng. Chem.* 20, 331-337. 2014.
- [2] Siddique M N I, Munaim M S A M and Zularisam AW, "Influence of food to microbe ratio variation on bio-energy production during anaerobic co-digestion", *J. Taiwan. Inst. Chem. E.* 20, 331-337. 2016.
- [3] Siddique M N I, Munaim M S A M and Zularisam AW, "Influence of flow rate variation on bio-energy generation during anaerobic co-digestion", *J. Ind. Eng. Chem.* 27, 44-49. 2015.
- [4] Siddique M N I, Munaim M S A M and Zularisam AW, "Role of hydraulic retention time in enhancing bio-energy generation from Petrochemical wastewater", *J. Clean. Prod.* 133, 504-510. 2016
- [5] Siddique M N I, Munaim M S A M and Zularisam AW, "Feasibility analysis of anaerobic co-digestion of activated manure and petrochemical wastewater in Kuantan (Malaysia)", *J. Clean. Prod.* 106, 380-388. 2015
- [6] Syukor A R, Sulaiman S, Siddique M N I, Zularisam A W, Said M I M, "Integration of Phytogreen in Heavy Metal removal from wastewater", *J. Clean. Prod.* 112, 3124-3131. 2016
- [7] Siddique M N I, Munaim M S A M and Zularisam AW, "Role of biogas recirculation in enhancing petrochemical wastewater treatment efficiency of continuous stirred tank reactor," *J. Clean. Prod.* 145, 303-309. 2017
- [8] Siddique M N I, Munaim M S A M and Zularisam AW, "The combined effect of ultrasonic and microwave pre-treatment on bio-methane generation from co-digestion of petrochemical wastewater," *J. Clean. Prod.* 91, 229-234. 2015
- [9] Siddique M N I, Munaim M S A M and Zularisam AW, "Bioenergy production from co-digestion of chemically-treated petrochemical wastewater and activated manure sludge", *Ener. Edu. Sci. Technol.* 31(1), 59-70.2013
- [10] Siddique M N I, Munaim M S A M and Zularisam AW, "Cycle time minimization during renewable methane production from H_2O_2 enhanced anaerobic Co-digestion of Petrochemical wastewater in CSTR", *Asian. J. Chem.* 25, 80-90. 2013
- [11] Nasrullah M, Siddique M N I and Zularisam AW, "Effect of High Current Density in Electrocoagulation Process for Sewage Treatment", *Asian. J. Chem.* 26, 4281-4285. 2014

- [12] Siddique M N I, Munaim M S A M and Zularisam AW, "Role of H₂O₂ enhanced anaerobic co-digestion of Petrochemical wastewater on cycle time minimization during biomethanation". *Sci. Res.Essay.* 8(22), 996-1009. 2013
- [13] Siddique M N I and Zularisam AW, "Application of chemical & biological coupled treatment technology in POME and petrochemical wastewater as biodegradation alternative". *J. Environ. Sci. Technol.* 5(3), 155-167. 2012
- [14] Siddique M N I and Zularisam AW, "Continuous stirred tank reactor application for renewable methane from anaerobic biodegradation of Petrochemical wastewater". *Eng. E-Transac.* 7, 23-27. 2012
- [15] Siddique M N I and Zularisam AW, "Temperature and organic loading rate influence on biomethanation of Petrochemical wastewater using CSTR". *Int. J. Civ. Eng. Geo-Environ.* 2 59-64. 2012
- [16] Siddique M N I and Zularisam AW, "Bio-filtration performance of Petrochemical wastewater using Continuous stirred tank reactor". *Int. J. Civ. Eng. Geo-Environ.* 3, 65-70. 2012
- [17] Singh L, Siddique M N I and Zularisam AW, "Optimization of sustained hydrogen production from palm oil mill effluent using immobilized mixed culture". *Int. J. Civ. Eng. Geo-Environ.* 3, 71-76, 2012
- [18] Siddique M N I and Zularisam AW, "Sustainable bio-methane generation from petrochemical wastewater using CSTR". *Int. J. Civ. Eng. Geo-Environ.* 1, 1-5. 2012
- [19] Siddique M N I and Zularisam AW, "Enhanced production of renewable methane from petrochemical wastewater using CSTR". *Int. J. Environ. Eng.* 1 (4), 95 – 99. 2012
- [20] Qasim B, Syukor A R, Siddique M N I, Suryati S and Hamizah H N, "Controlling Assessment of Disinfection by Products in Drinking Water-A Review". *Int. J. Inno. Sci. Eng. Technol.* 2, 1-7. 2015
- [21] Syukor A R, Zularisam AW, Said M I M and Siddique M N I, "Bio-sorption of Chromium using Aquatic Plant, *Lepironia Articulata*". *Adv. Environ. Biol.* 1, 13. 2015
- [22] Siddique M N I and Zularisam AW, "Renewable Methane from supplementation of ammonium bicarbonates for the treatment of Petrochemical wastewater during anaerobic digestion process". *International Conference on Advances Science and Contemporary Engineering vol 50 (Jakarta: Proceedia Engineering Elsevier)* 134 – 141. 2012
- [23] Siddique M N I and Zularisam AW, "Renewable Methane from anaerobic biodegradation of Petrochemical wastewater using continuous stirred tank reactor (CSTR)". *National conference for postgraduate Research Centre for postgraduate Research Centre for Graduate Studies*, 7-8 Sep. 2012, Kuantan Malaysia
- [24] Siddique M N I and Zularisam AW, "Enhanced production of renewable methane from petrochemical wastewater using CSTR". *International conference on advances in applied science and environmental engineering, ASEE-2014*, 02-03August. 2014, Kualalampur Malaysia
- [25] Siddique M N I and Zularisam AW, "Anaerobic bioconversion of methane from petrochemical wastewater using CSTR". *International conference on energy and environmental sciences ICEES-2014*, 04-05 Sep. 2014, Kualalampur Malaysia
- [26] Siddique M N I and Zularisam AW, "Intensified CSTR for bio-methane generation from petrochemical wastewater". *International conference on chemical, environmental and biological sciences CEBS-2014*, 17-18, Sep. 2014, Kualalampur Malaysia.
- [27] Siddique M N I and Zularisam AW, "Biomethane generation potential of petrochemical wastewater by anaerobic digestion using CSTR", *4th Johor Biotechnology Conference and Exhibition*, 2014, 26-27 August 2014 Johor Malaysia.
- [28] Siddique M N I and Zularisam AW, "High rate bio-methane generation from Petrochemical wastewater using improved CSTR". *ICWRRED 2016 :18th Int. Conf. on*

Water Resources and Renewable Energy Development. Jan 25-26 2016 Istanbul Turkey.
[29] Siddique M N I, Munaim M S A M and Zularisam AW, “Role of ammonium bicarbonates in methanogenesis while co-digesting petrochemical wastewater with activated manure sludge”. *Ener. Edu. Sci. Technol.* 31(1), 80-90. 2013